

NAI

Novia Associates, Inc.
1 Northwestern Dr.
Salem, NH 03079
Ph: 603-898-8600
Fax: 603-898-2755
email: info@noviaassociates.com


PROJECT: _____

CUSTOMER: _____


Single Strut Seismic Restraint Types 4, 5, & 6

SD DUCT 4-5-6 12/06/06


Transverse Types: 4T, 5T & 6T

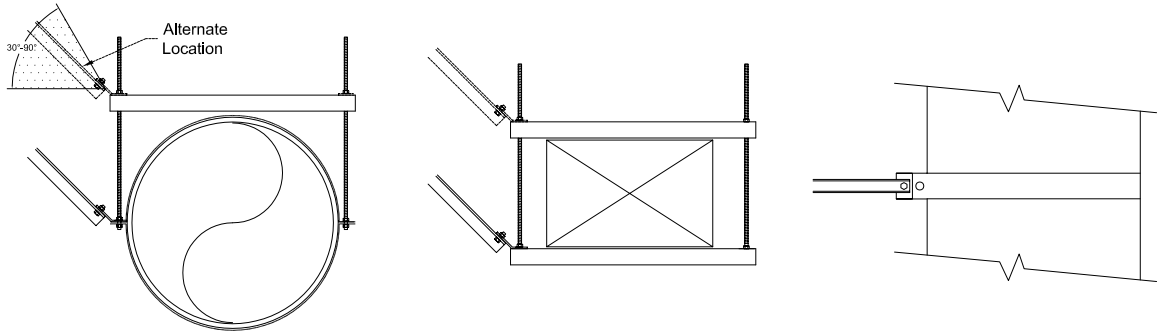


Longitudinal Types: 4L, 5L & 6L

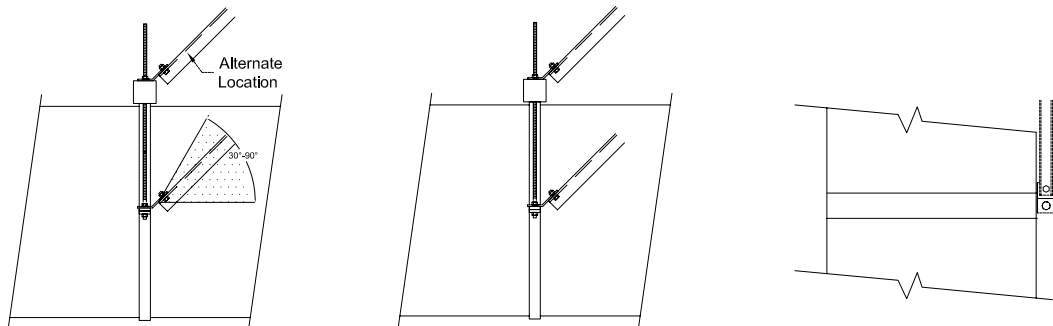

Transverse & Longitudinal Types: 4T/L, 5T/L & 6T/L

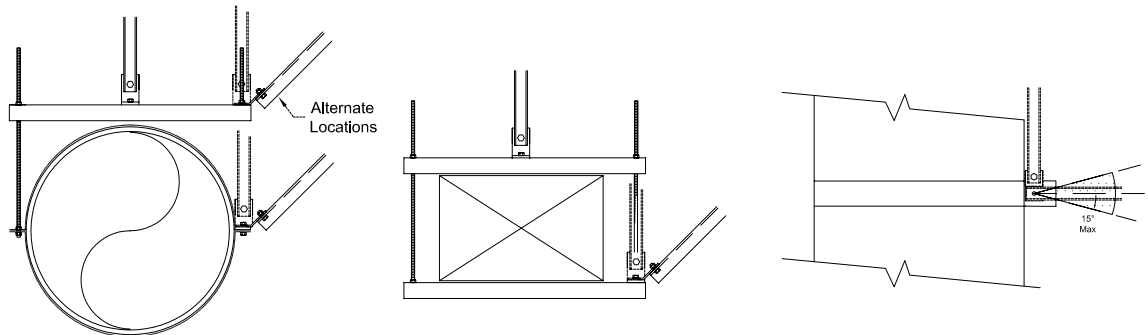

Attachment to Structure Details

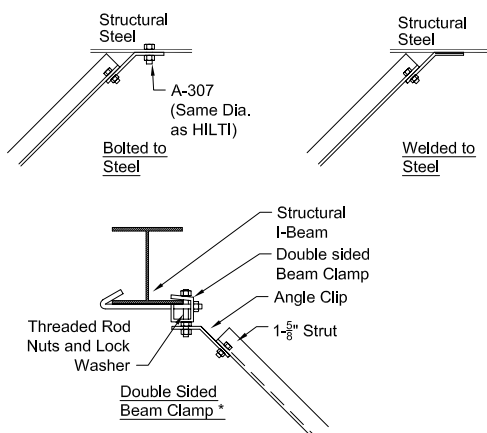


Concrete Anchor
Type 4 = $\frac{3}{8}$ " x $2\frac{1}{2}$ " Embedment
Type 5 = $\frac{5}{8}$ " x 4" Embedment
Type 6 = (2) $\frac{5}{8}$ " x 4" Embedment


Notes:

- 1) For Restraint Type 6 use (1) L3 x 3 x 9"
- $\frac{1}{4}$ " Angles at connections to structure instead of 45° angle clips.
- 2) Maximum Strut Length = 10'-0"
- 3) Strut to Clip Bolt Dia.

Type 4 & 5 = $\frac{1}{2}$ "
Type 6 = $\frac{5}{8}$ "



*** By Others**
Hilti's, Nuts, Bolts,
Washers, & Beam Clamps



Type 6

BY:

DATE:

DWG#: