





Novia Associates, Inc.
1 Northwestern Dr.
Salem, NH 03079
Ph: 603-898-8600
Fax: 603-898-2755
email: info@
noviaassociates.com

PROJECT: _____

CUSTOMER: _____

RSM-B

1" DEFLECTION
RESTRAINED SPRING
MOUNTING
RSM-B 100 07/25/13

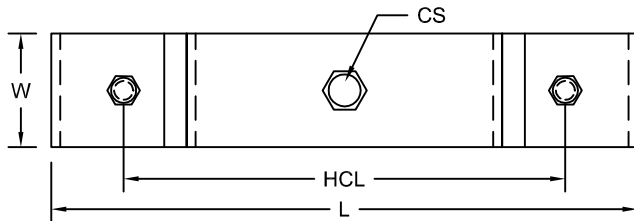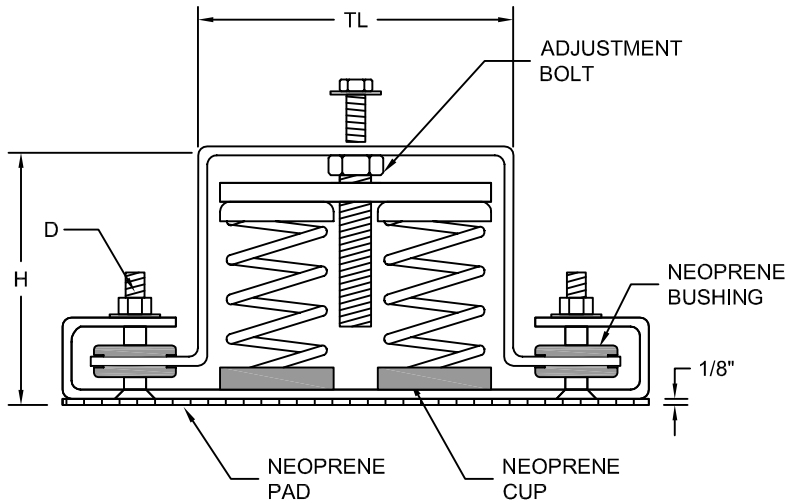

PLAN VIEW

SPRING DATA

SIZE	RATED CAPAC (LBS)	RATED DEFL (IN)	SPRING CONST (LBS/IN)	COLOR
B-261	261	1.04	250	GRN
B-371	371	1.24	300	ORG
B-640	640	1.28	500	BLUE
B-731	731	1.04	700	BLK
B-908	908	1.01	900	GRAY
B-1044	1044	1.04	1000	BLK*
B-1221	1221	1.02	1200	GRAY*
B2-1462	1462	1.04	1400	BLK
B2-1816	1816	1.01	1800	GRAY
B2-2088	2088	1.04	2000	BLK*
B2-2442	2442	1.02	2400	GRAY*

* 313 RED CORE SPRING

B = 1 SPRING

B2 = 2 SPRINGS

SPRING
O.D.

FREE
HGT

RATIO
OD/OH

2.00"

3.375"


0.84 - 0.96

RSM DIMENSIONS (IN)

SIZE	L	W	H	TL	HCL	D	CS
B	8 1/2	2 1/4	5 1/8	3 1/8	5 5/8	3/8	3/8
B2	11 5/8	2 1/4	5 1/8	6 1/4	8 3/4	3/8	3/8

H = FREE & OPERATING HEIGHT

OPTIONAL ATTACHMENTS



FRICITION

BOLTED

^WELDED

CONCRETE

^REMOVE NEOPRENE PAD

CERTIFICATION DATA

TAG _____
UNIT _____



MOUNT LOCATION PLAN VIEW

1	2
3	4
5	6
7	8
9	10

MATERIAL FOR ONE SET _____ SET(S) REQUIRED

BY:

DATE:

DWG#:





Novia Associates, Inc.
1 Northwestern Dr.
Salem, NH 03079
Ph: 603-898-8600
Fax: 603-898-2755
email: info@noviaassociates.com

PROJECT: _____

CUSTOMER: _____

RSM-B

1" DEFLECTION
RESTRAINED SPRING
MOUNTING
RSM-B 100 07/25/13

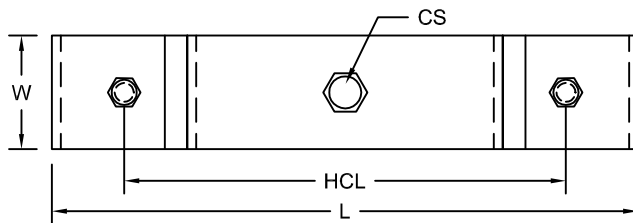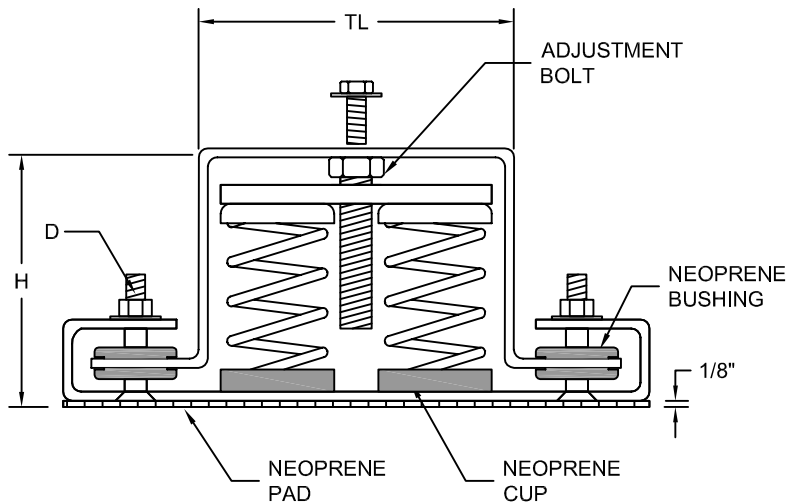

PLAN VIEW

SPRING DATA

SIZE	RATED CAPAC (LBS)	RATED DEFL (IN)	SPRING CONST (LBS/IN)	COLOR
B-261	261	1.04	250	GRN
B-371	371	1.24	300	ORG
B-640	640	1.28	500	BLUE
B-731	731	1.04	700	BLK
B-908	908	1.01	900	GRAY
B-1044	1044	1.04	1000	BLK*
B-1221	1221	1.02	1200	GRAY*
B2-1462	1462	1.04	1400	BLK
B2-1816	1816	1.01	1800	GRAY
B2-2088	2088	1.04	2000	BLK*
B2-2442	2442	1.02	2400	GRAY*

* 313 RED CORE SPRING

B = 1 SPRING

B2 = 2 SPRINGS


SPRING O.D.	FREE HGT	RATIO OD/OH
2.00"	3.375"	0.84 - 0.96

RSM DIMENSIONS (IN)

SIZE	L	W	H	TL	HCL	D	CS
B	8 1/2	2 1/4	5 1/8	3 1/8	5 5/8	3/8	3/8
B2	11 5/8	2 1/4	5 1/8	6 1/4	8 3/4	3/8	3/8

H = FREE & OPERATING HEIGHT

OPTIONAL ATTACHMENTS



FRICION BOLTED ^WELDED CONCRETE

^REMOVE NEOPRENE PAD

CERTIFICATION DATA

BY:

DATE:

DWG#: